CORPS OF ENGINEERS

U.S. ARMY

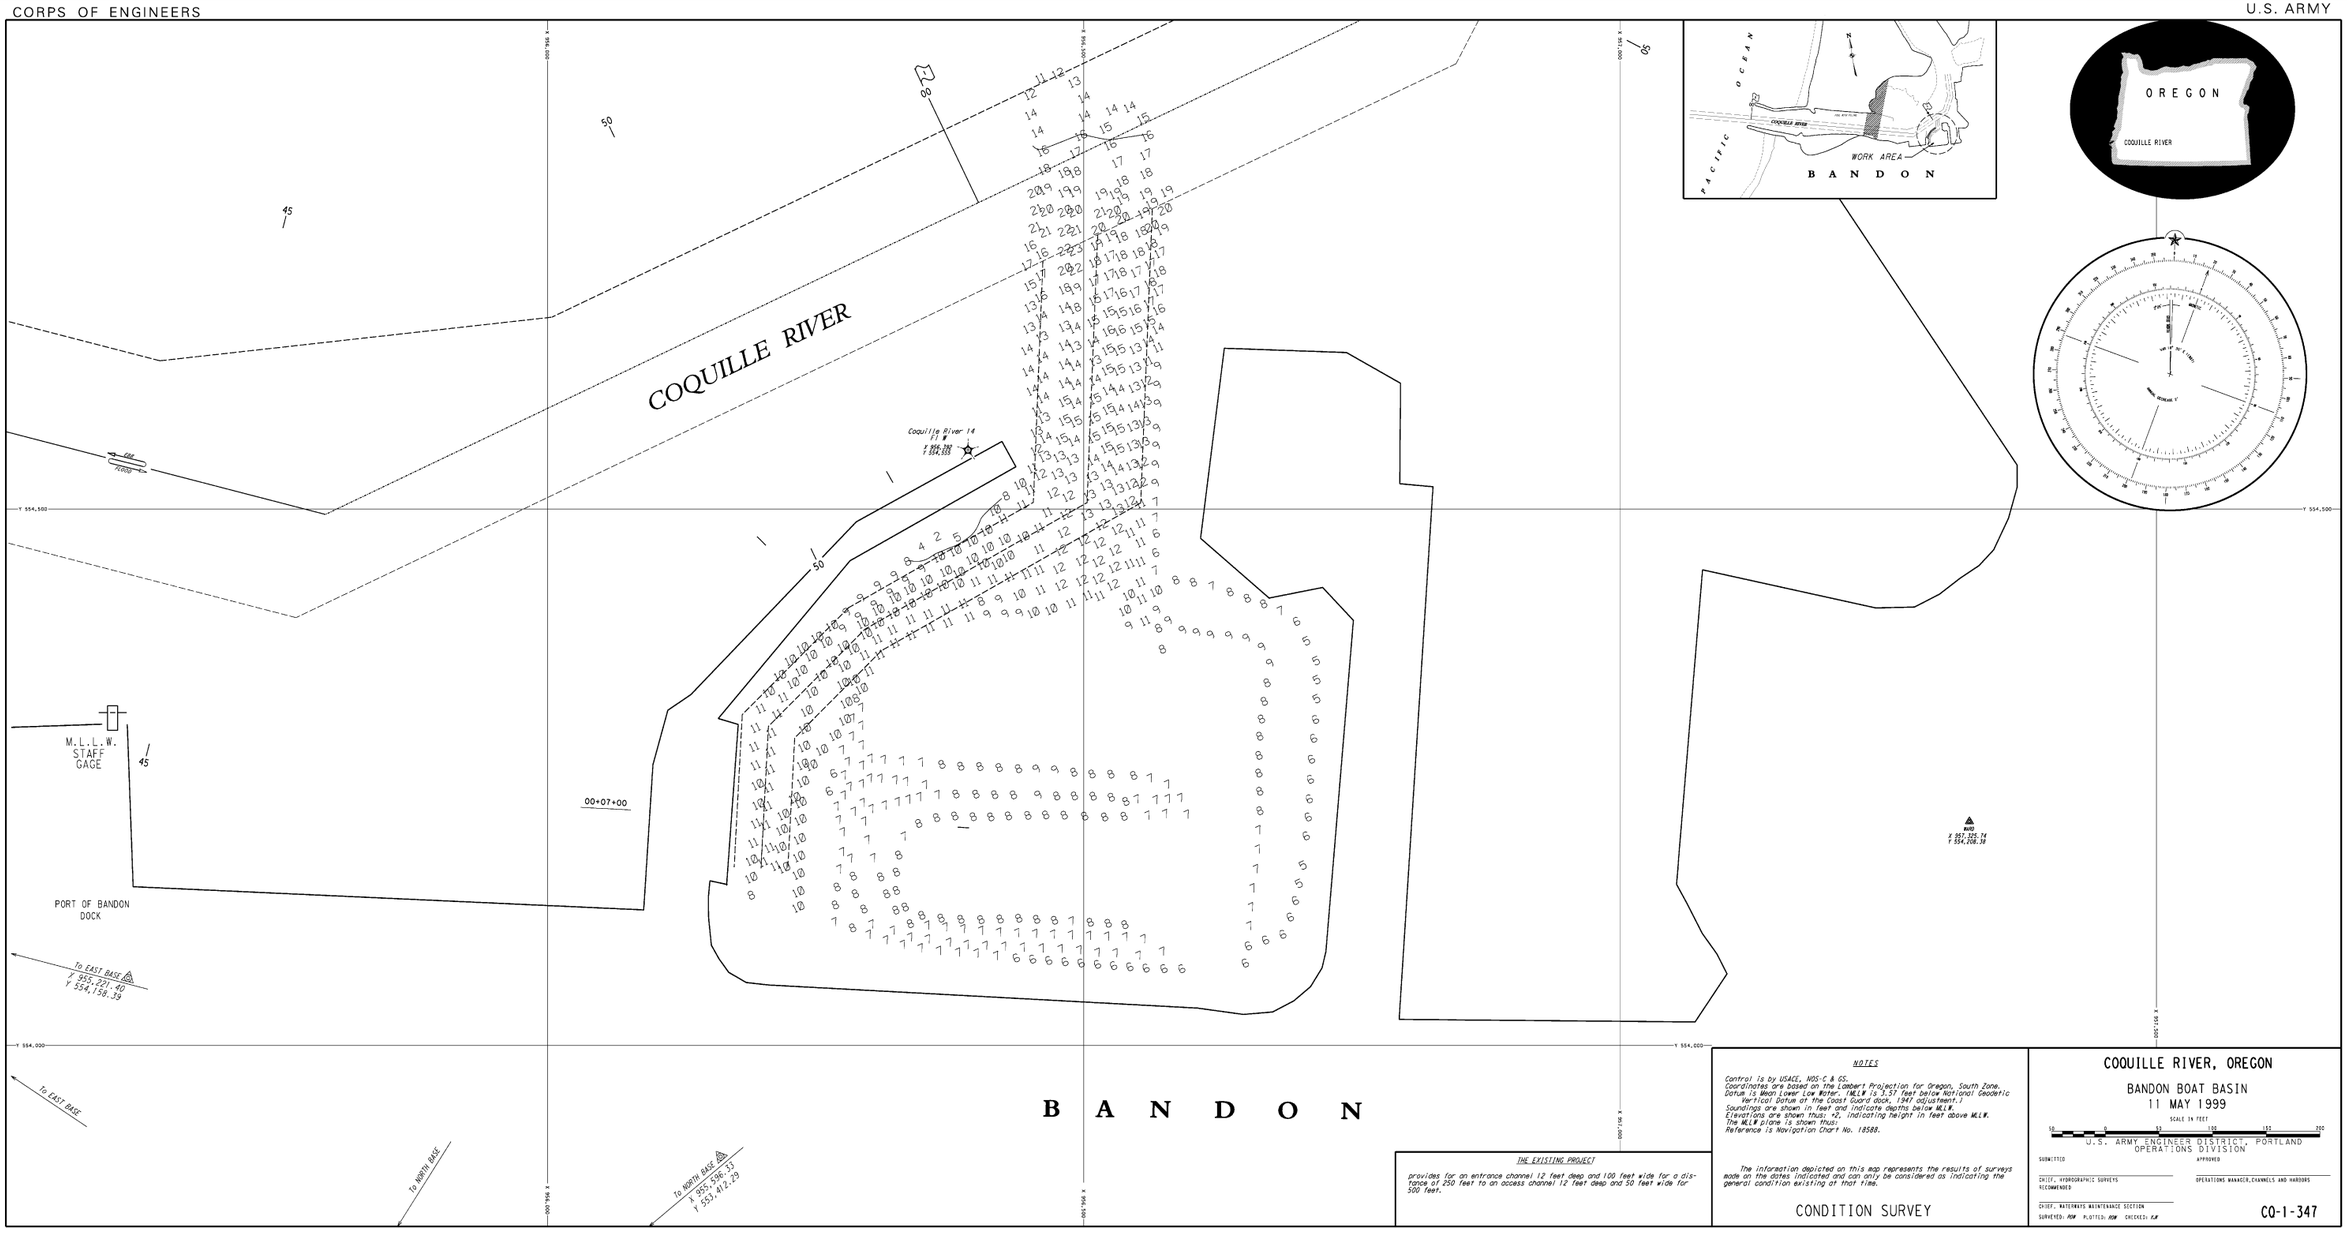

NOTES

Control is by USACE, NOS-C & GS.
Coordinates are based on the Lambert Projection for Oregon, South Zone.
Datum is Mean Lower Low Water. (MLLW is 2.57 feet below National Geodetic Vertical Datum of the Coast Guard dock, 1947 adjustment.)
Soundings are shown in feet and indicate depths below MLLW.
Elevations are shown thus: +2, indicating height in feet above MLLW.
The MLLW plane is shown thus:
Reference is Navigation Chart No. 18588.

The information depicted on this map represents the results of surveys made on the dates indicated and can only be considered as indicating the general condition existing at that time.

CONDITION SURVEY

THE EXISTING PROJECT

provides for an entrance channel 12 feet deep and 100 feet wide for a distance of 250 feet to an access channel 12 feet deep and 50 feet wide for 500 feet.

COQUILLE RIVER, OREGON

BANDON BOAT BASIN

11 MAY 1999

SCALE IN FEET

50 0 50 100 150 200

U.S. ARMY ENGINEER DISTRICT, PORTLAND
OPERATIONS DIVISION

SUBMITTED

CHIEF, HYDROGRAPHIC SURVEYS RECOMMENDED

CHIEF, WATERWAYS MAINTENANCE SECTION

APPROVED

OPERATIONS MANAGER, CHANNELS AND HARBORS

SURVEYED: PDM PLOTTED: PDM CHECKED: PJM

CQ-1-347