CORPS OF ENGINEERS

U.S. ARMY

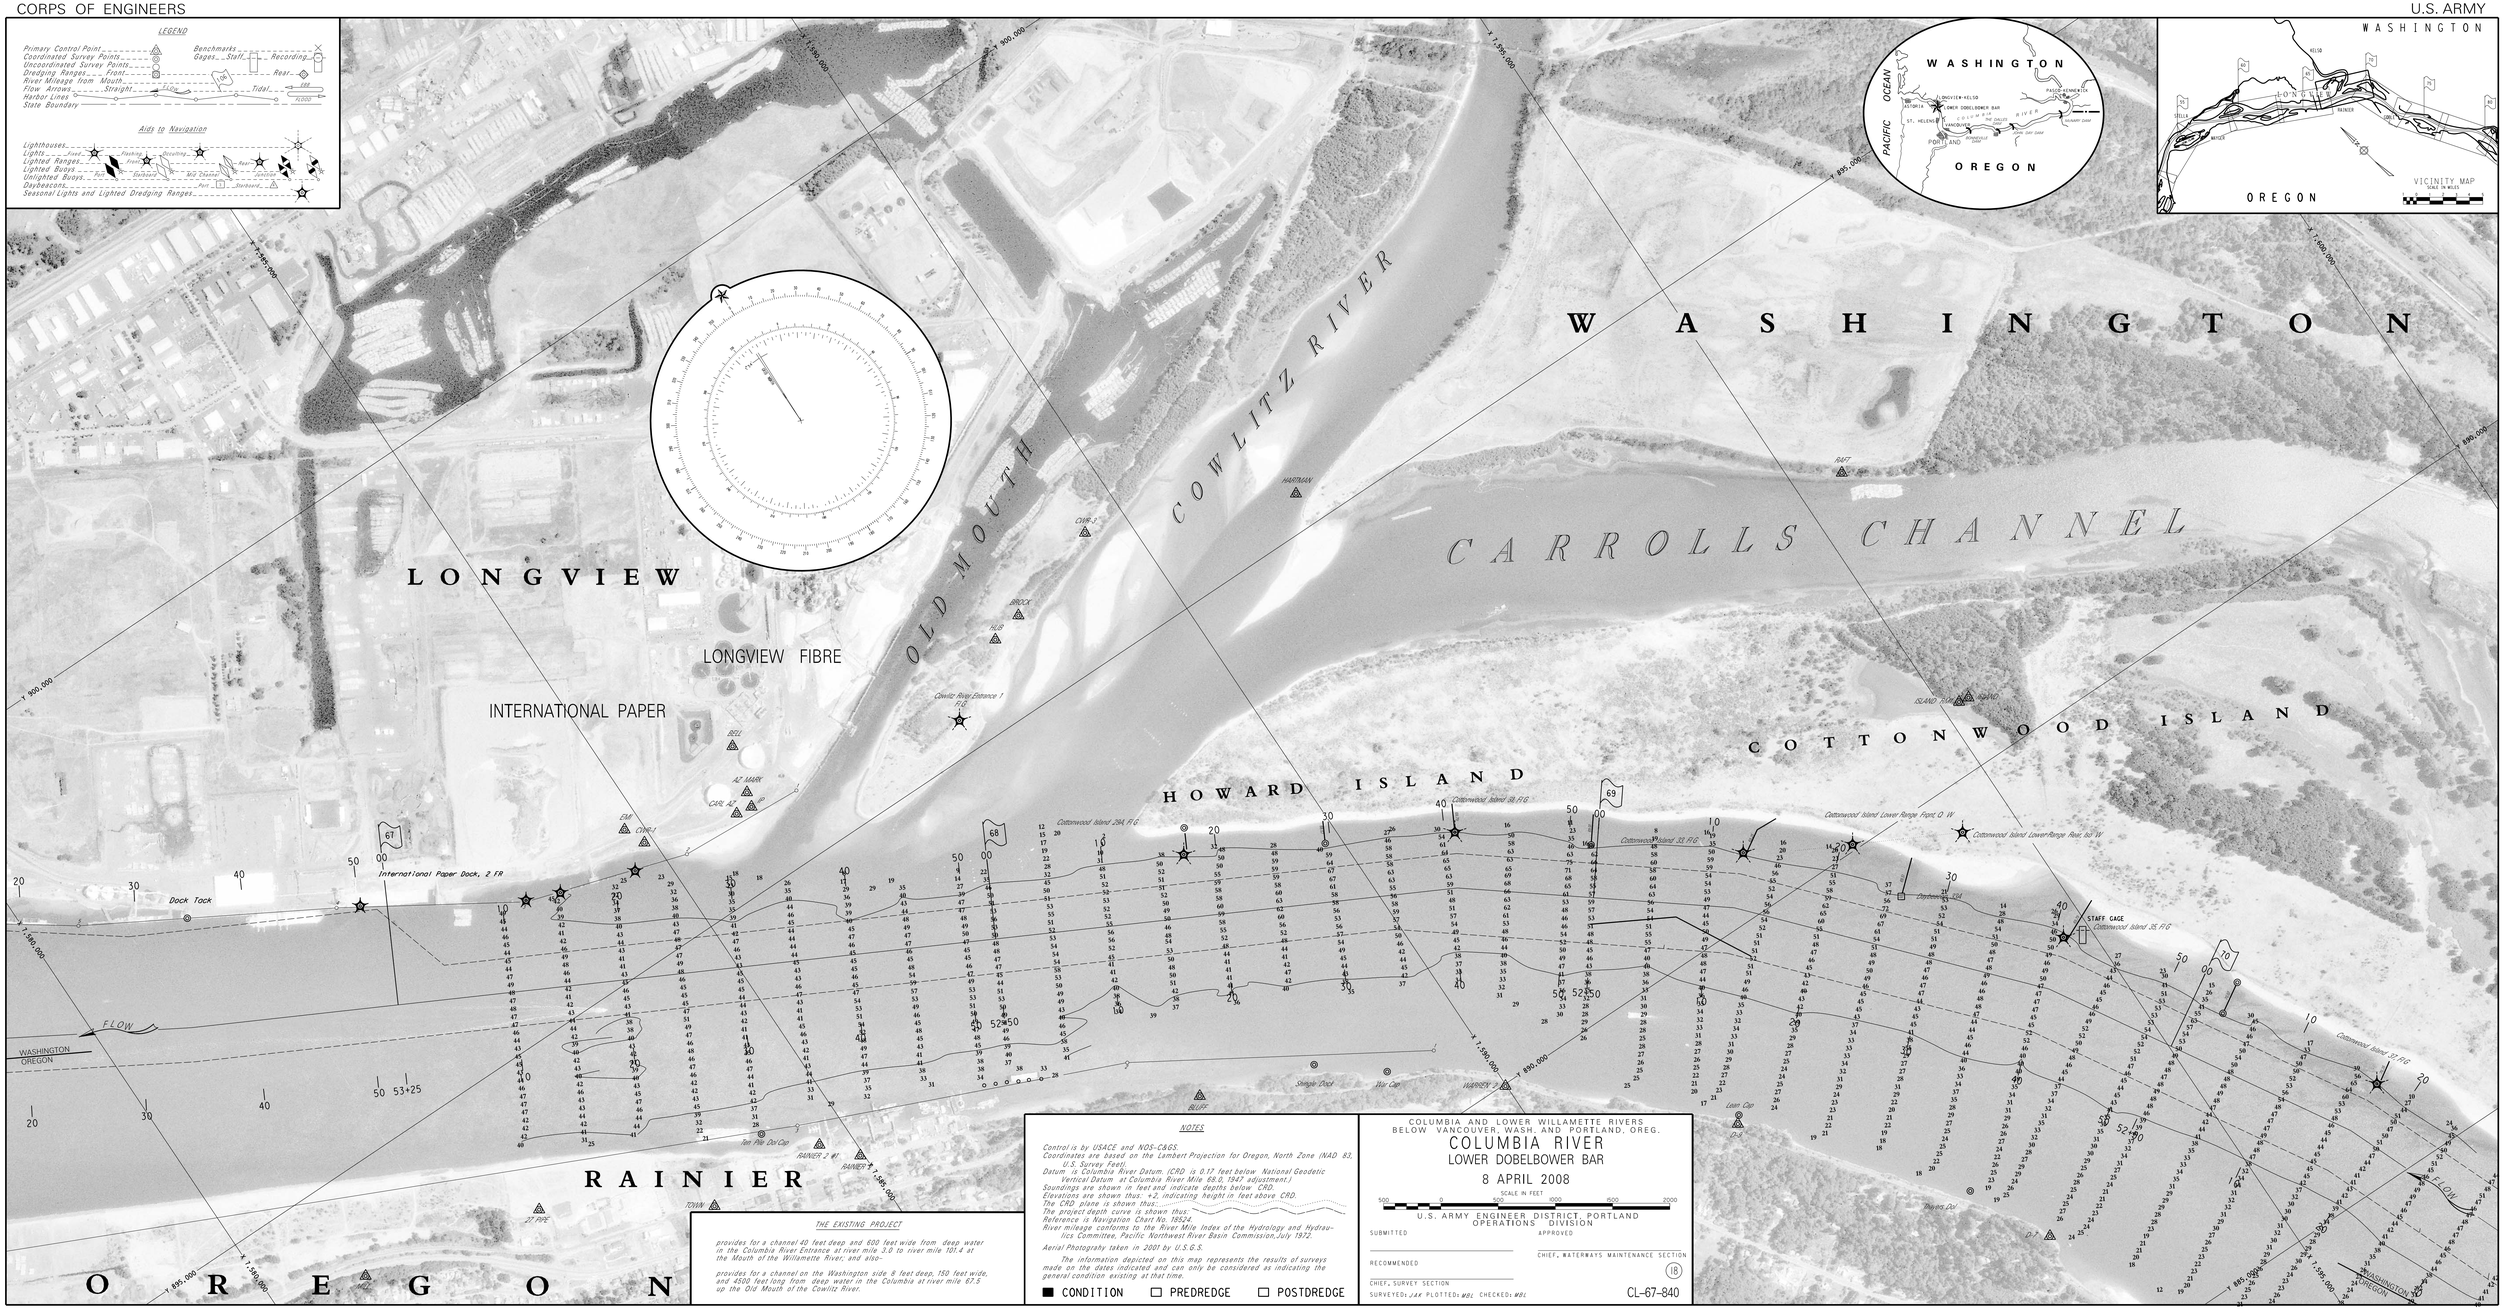

NOTES

Control is by USACE and NOS-C&GS.
Coordinates are based on the Lambert Projection for Oregon, North Zone (NAD 83, U.S. Survey Feet).
Datum is Columbia River Datum. (CRD is 0.17 feet below National Geodetic Vertical Datum at Columbia River Mile 68.0, 1947 adjustment.)
Soundings are shown in feet and indicate depths below CRD.
Elevations are shown thus: +2, indicating height in feet above CRD.
The CRD plane is shown thus:
The project depth curve is shown thus:
Reference is Navigation Chart No. 18524.
River mileage conforms to the River Mile Index of the Hydrology and Hydraulics Committee, Pacific Northwest River Basin Commission, July 1972.

Aerial Photography taken in 2001 by U.S.G.S.

The information depicted on this map represents the results of surveys made on the dates indicated and can only be considered as indicating the general condition existing at that time.

■ CONDITION ☐ PREDREDGE ☐ POSTDREDGE

THE EXISTING PROJECT

provides for a channel 40 feet deep and 600 feet wide from deep water in the Columbia River Entrance at river mile 3.0 to river mile 101.4 at the Mouth of the Willamette River; and also-

provides for a channel on the Washington side 8 feet deep, 150 feet wide, and 4500 feet long from deep water in the Columbia at river mile 67.5 up the Old Mouth of the Cowlitz River.

COLUMBIA AND LOWER WILLAMETTE RIVERS
BELOW VANCOUVER, WASH. AND PORTLAND, OREG.

COLUMBIA RIVER
LOWER DOBELBOWER BAR

8 APRIL 2008

SCALE IN FEET
500 0 1000 2000 3000 4000 5000 6000

U.S. ARMY ENGINEER DISTRICT, PORTLAND
OPERATIONS DIVISION

SUBMITTED

APPROVED

RECOMMENDED

CHIEF, WATERWAYS MAINTENANCE SECTION

CHIEF, SURVEY SECTION

SURVEYED: JAK PLOTTED: MBL CHECKED: MBL

18

CL-67-840

DISTRIBUTION COPY